


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

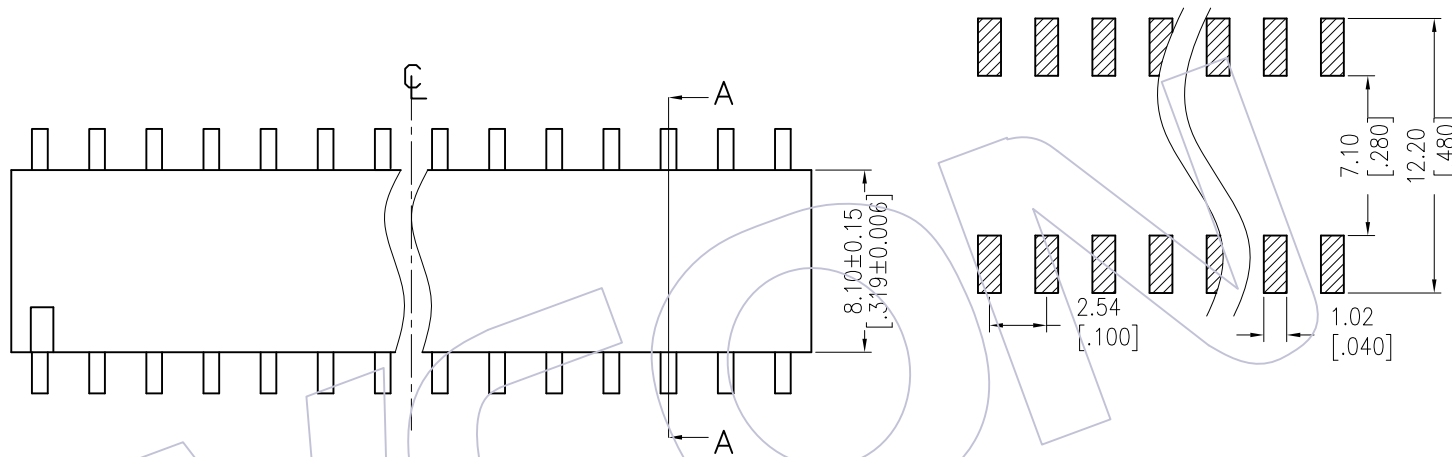



Ordering Information

2134 - 1 XX M XX CUN X 1

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Matte Tin
 S3=10μ"Gold/Matte Tin
 S4=15μ"Gold/Matte Tin
 S5=30μ"Gold/Matte Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube
 R=Tape&Reel

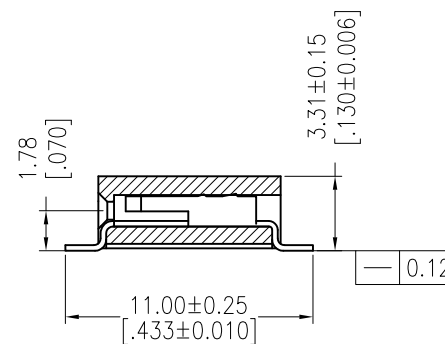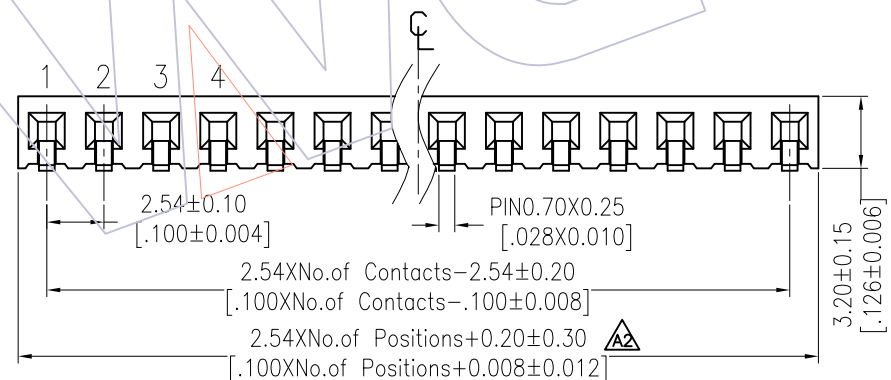

Item	Pitch	Mating
Standard	2.54	1125B
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2016/11/10	Modify	A3	x.X ±0.40	Surong Xu	2016/11/09	UNIT	mm	2134-1XXMXXCUNX1
A2	2012/09/20	MODIFY ADD +0.20		x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: FH2.54 SINGLE ROW 180°SMT SIDE ENTER H=3.2
A1	2012/08/24	Change the mating object		x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2012/08/02	NEW	-----	Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com