

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0


Ordering Information

2243-1 XX R XX CUN T 1

No. of Pins per Row: 02-40Pin
 Contact Plating: G0=Gold Flash, G1=10μ"Gold, G2=15μ"Gold, G3=30μ"Gold, G4=50μ"Gold, G5=50μ"Gold Flash/Tin, S0=Gold Flash/Tin, S1=10μ"Gold/Tin, S2=15μ"Gold/Tin, S3=30μ"Gold/Tin, S4=50μ"Gold/Tin, S5=30μ"Gold/Tin, S6=15μ"Gold/Tin, S7=10μ"Gold/Tin, S8=50μ"Gold/Tin, S9=15μ"Gold/Tin, S10=10μ"Gold/Tin

Packing: T=Tray, A=Tray

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

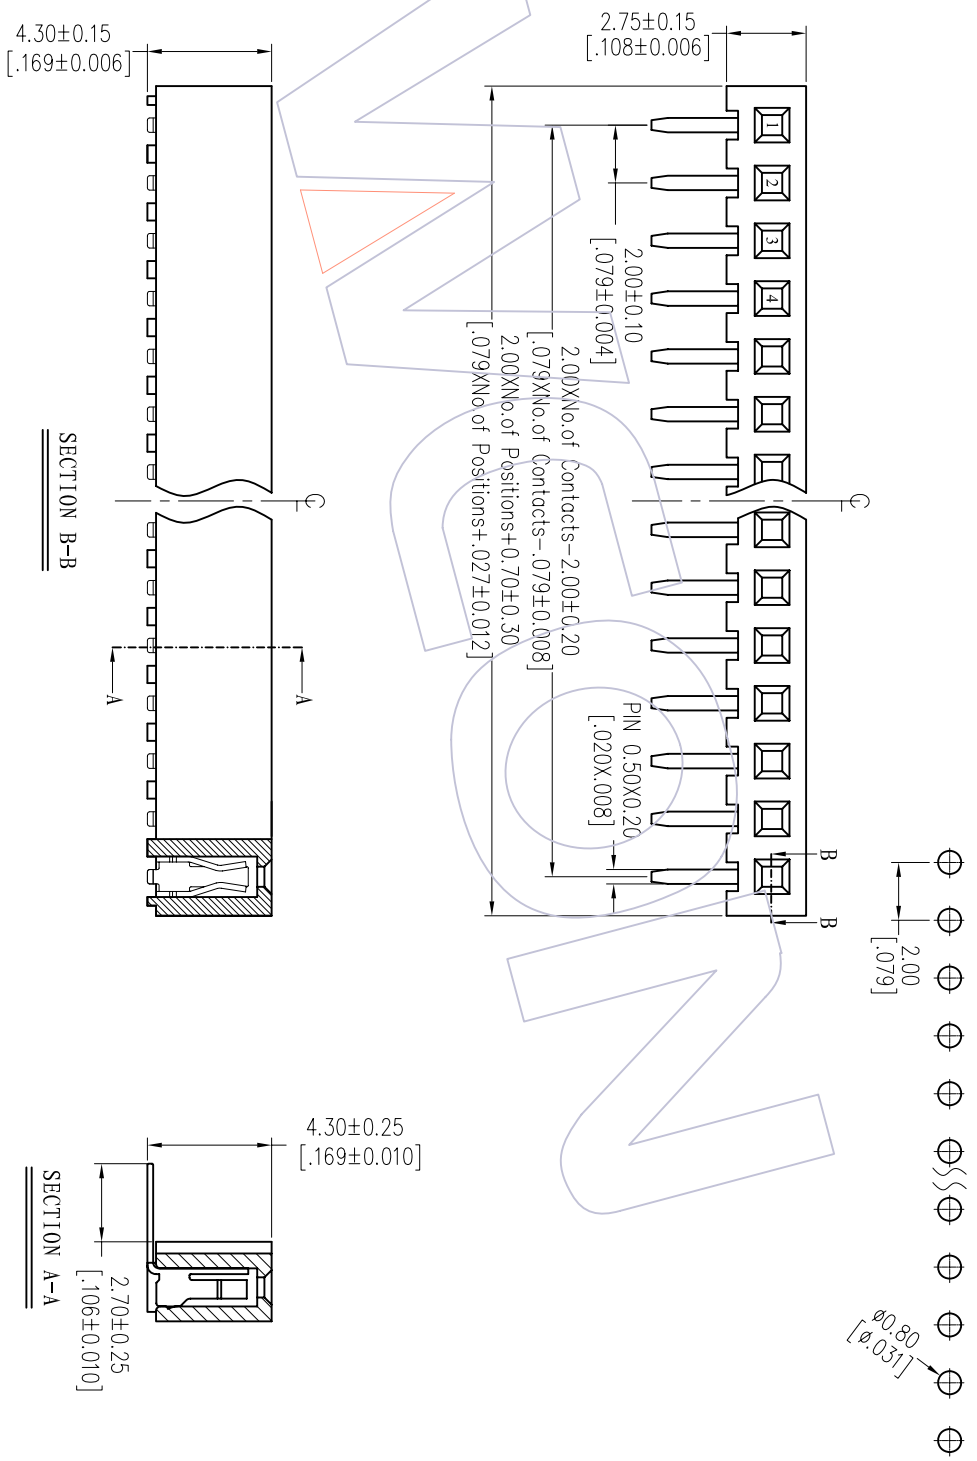

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan	
A0	2012/07/13	NEW		X.XXX	± 3'	CHECK	2012/07/13	1/1		2243-1XXRXXCUNT1	FI12.00mm SINGLE ROW 90° DIP H=4.30	Http: www.wcon.com	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com